


GENERAL NOTES

1. Refer to Centres Detail Design Manual for required footpath surface finish.
2. Refer to UMS 232 for standard concrete pathway details and specifications.
3. Refer to UMS 745 for asphalt pathway details and specification.
4. Double kerb to be used only where crossfall from property boundary to kerb is greater than 1:40. Approval from Brisbane City Council 'Development Assessment' to be obtained.
5. All dimensions in millimeters (UNO).

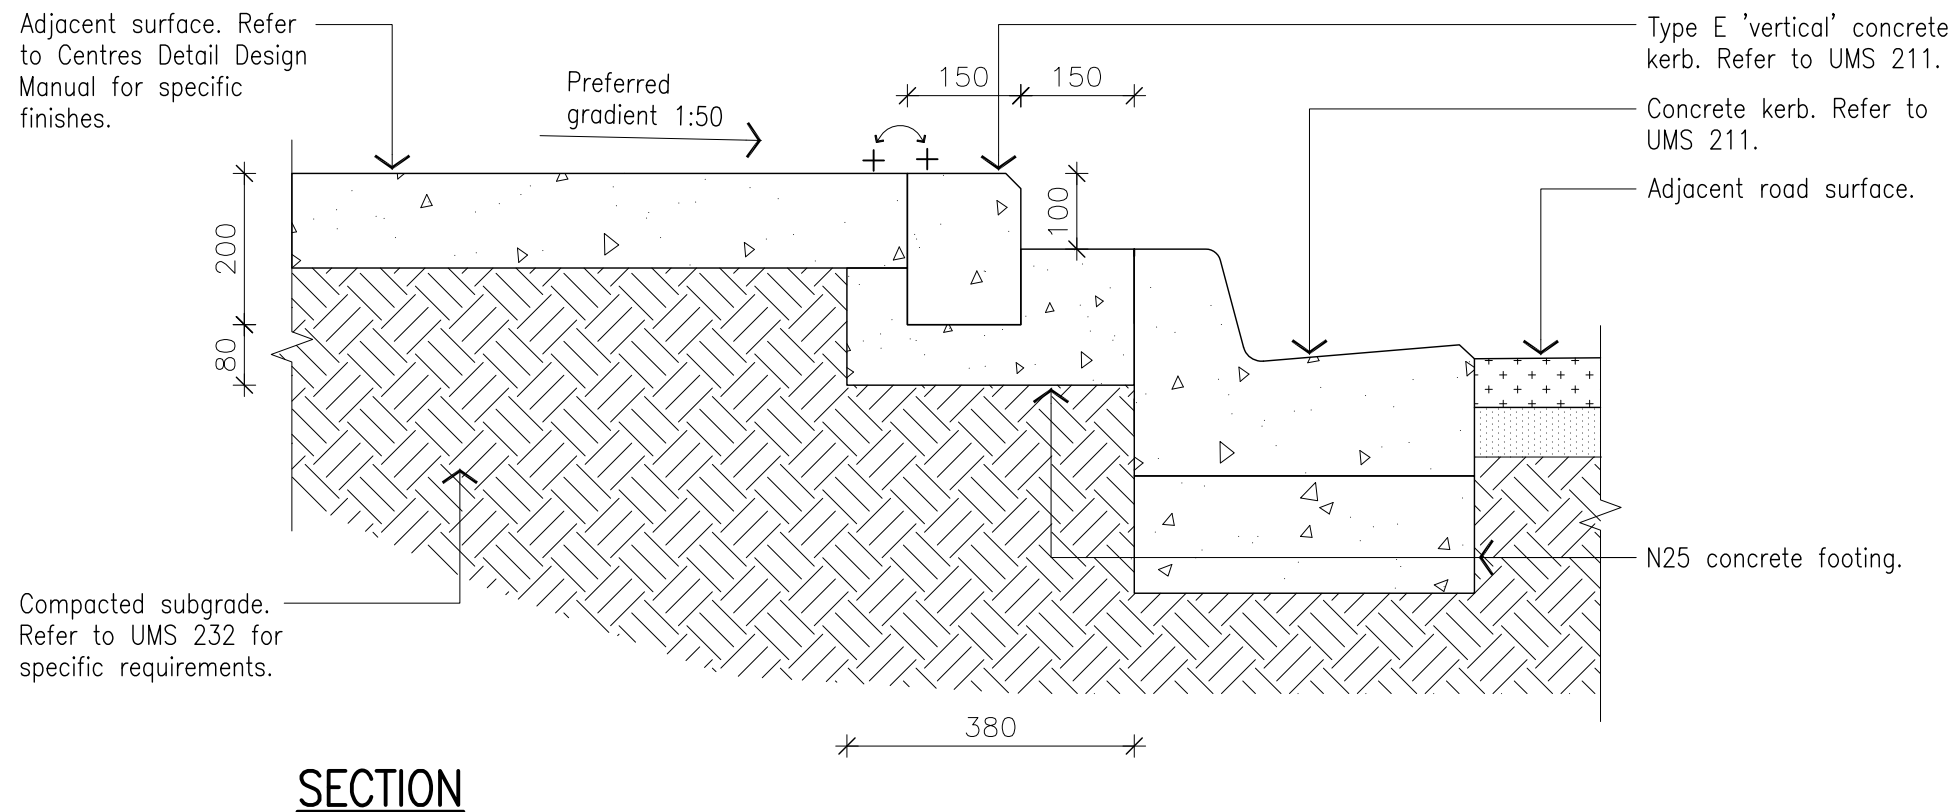

STRUCTURAL DESIGN REVIEWED AND CERTIFIED FOR ISSUE  
 NAME: B. BALAKUMAR RPEQ: 3963  
 SIGNATURE: SIGNATURE ON ORIGINAL DATE: 28/07/10

ISSUE	AMENDMENT	DRAWN DATE	CHK'D DATE	APPR'D DATE
B	NOTE AMENDMENTS	OCT '11	OCT '11	OCT '11
A	ORIGINAL ISSUE	JUN '10	JUN '10	JUN '10

DESIGN AUTHORISED FOR ISSUE			
P. COTTON SIGNATURE ON ORIGINAL			
MANAGER CITY ASSETS, R.P.E.Q: 2 5 4 6			
DESIGN APPROVED			
V. MARTIN SIGNATURE ON ORIGINAL DATED 06/9/10			
PRINCIPAL OFFICER URBAN DESIGN UNIT			
DESIGN	BAS	DATE	JUN '10
DRAWN	PRM	DATE	JUN '10
CHECKED	D.K. SIGNATURE ON ORIGINAL 28-07-10	DATE	JUN '10
DRAWING FILENAME	UMS 548		
ASSOCIATED PLANS			



**BRISBANE CITY COUNCIL STANDARD DRAWING**

**DOUBLE KERB TO FOOTPATH**

SCALE: NOT TO SCALE  
 DWG No. **UMS 548**  
 ORIGINAL SIZE: A3 REVISION: B