


**DOG OFF LEASH FENCE – SECTION**

SCALE 1:20

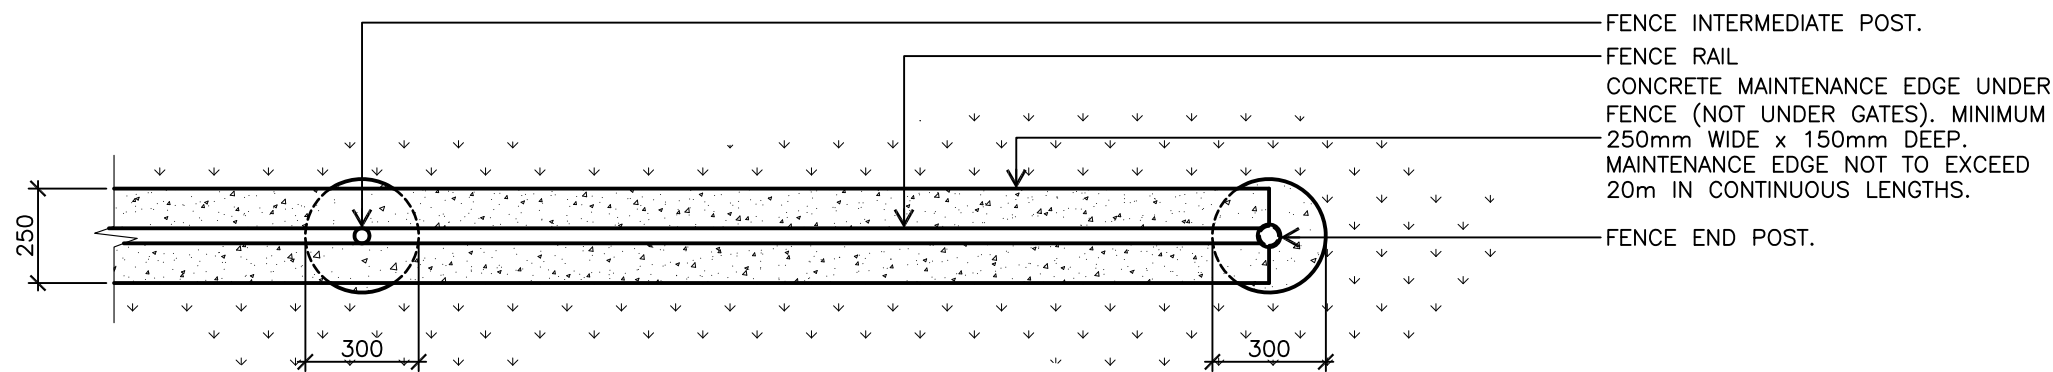

**DOG OFF LEASH FENCE – PLAN**

SCALE 1:20

**FIXTURES/FITTINGS/METAL WORK**

ALL FIXTURES/FITTINGS UNLESS SPECIFIED ARE TO BE HOT DIPPED GALVANISED.

GRIND SMOOTH EDGES & WELDS PRIOR TO H.D.G. OR APPLIED FINISHES.

ALL WELDS TO BE CONTINUOUS, GROUND OFF SMOOTH & FLUSH.

**GENERAL NOTES**

ENSURE MOWN HEIGHT OF GRASS (TURF) FINISHES FLUSH WITH MAINTENANCE EDGE.

ENSURE PARK ELEMENTS ARE LOCATED AND LANDSCAPED IN ACCORDANCE WITH DETAILED LANDSCAPE PLAN, AND SUBDIVISION AND DEVELOPMENT GUIDELINES.

ENSURE PARK ELEMENTS ARE CLEANED OF CONCRETE SLURRY OR SPRAY WHEN INSTALLED TO PREVENT STAINING OR DAMAGE TO APPLIED FINISHES.

ALL DIMENSIONS IN MILLIMETRES (U.N.O.).

**SPECIFICATIONS**

STANDARD IS NOT FOR USE IN A MARINE ENVIRONMENT. THE MARINE ENVIRONMENT COULD EXTEND UP TO 1 km FROM THE FORESHORE.

FOR NON-MARINE ENVIRONMENT, SUPPLY AND INSTALL 900-1200mm HIGH GALVANISED FENCE POST WITH TOP AND BOTTOM RAIL. ALL POSTS, RAILS AND FITTINGS TO BE GALVANISED STEEL TUBE TO AS 1163 THEN POWDER COATED.

WHERE STANDARD IS REQUIRED FOR USE WITH MARINE ENVIRONMENT, THE FOLLOWING PROTECTION TREATMENT FOR STEELWORK IS REQUIRED:

- HOT DIP GALVANISING: 85 MICRONS (600g/m<sup>2</sup>) MIN;
- SWEEP ABRASIVE BLAST;
- FIRST COAT: EPOXY PRIMER 75 MICRONS MIN;
- SECOND COAT: TWO PACK ACRYLIC OR POLYURETHANE GLOSS 75 MICRONS MIN;

ALL CHAINWIRE AND TIE WIRE (BOTH MARINE AND NON-MARINE APPLICATIONS) TO BE PVC COATED

COLOUR SELECTION FOR POWDER COATING AND MATCHING PVC COATING IN ACCORDANCE WITH STANDARD BCC CORPORATE COLOUR PALETTE "BCC GREY 3" (AS 2700S-1996 "N65 GRAPHITE GREY" EQUIVALENT).

REFER UMS 727 FOR SINGLE AND DOUBLE GATE REQUIREMENTS.

OTHER SPECIFICATIONS:

GATE, CORNER AND END POSTS (CAPPED) – 50NB (60.3 OD, 3.6 THICK)

INTERMEDIATE (POSTS CAPPED) – 40NB (48.3 OD, 3.2 THICK)

RAILS AND BRACES – 40NB (48.3 OD, 3.2 THICK)

CHAINWIRE – 50mm NOMINAL MESH WITH 2.5mm PVC COATED WIRE.

CABLES & STRINGERS – PVC COATED 3.15mm

PANELS – MAXIMUM 2400mm

ALL POSTS ARE TO BE CONCRETED INTO GROUND 300mmx600mm DEEP.

ANY GAPS BELOW FENCE OF MORE THAN 100mm ARE TO BE COVERED WITH INSTALLATION OF A BOTTOM STRINGER LINE, PVC COATED WITH AN IN LINE TENSIONER.

ISSUE	AMENDMENT	DRAWN DATE	CHK'D DATE	APPR'D DATE
D	Galv. Thickness Amended	DJL 07/12	IC 08/12	IC 08/12
C	Post, Rail, Wire Specifications Modified.	DJL 07/07	BH 08/07	BH 08/07
B	Marine Envir. Notes Added to Specification	DJL 08/05	JT 12/05	PC 21/3/06
A	ORIGINAL ISSUE	Dec '03	Jul '04	PC 09/04

DESIGN AUTHORISED FOR ISSUE PAUL COTTON SIGNATURE ON ORIGINAL DATED 03/09/04				DESIGN	CITY DESIGN - L.A.	DATE	Dec '03
MANAGER INFRASTRUCTURE MANAGEMENT R.P.E.Q: 2546				DRAWN	CITY DESIGN - L.A.	DATE	Dec '03
DESIGN APPROVED				CHECKED	UMD - E&P (J.T.) and IMB (D.L. & G.M.)	DATE	Jun '04
LAUREN TEMPLEMAN SIGNATURE ON ORIGINAL DATED 31/08/04				DRAWING FILENAME	UMS 726.dwg		
PRINCIPAL PROGRAM OFFICER PARKS				ASSOCIATED PLANS			



**BRISBANE CITY COUNCIL STANDARD DRAWING**

**FENCE  
DOG OFF LEASH**

SCALE 1:20  
DWG No. **UMS 726**  
ORIGINAL SIZE A3 REVISION D